

300W Small Solar Generator with Solar Panel, QC3.0 USB Output Portable **Charger Power Bank for Outdoor Home Emergency**

Basic Information

. Place of Origin: China Brand Name: MINKO CE, ROHS · Certification:

Model Number: Portable Power Station-M300

• Minimum Order Quantity: 5 pieces • Price: negotiation

· Packaging Details: L210xW85xH52 (mm) • Delivery Time: 8 -10 working days Payment Terms: T/T, Western Union,

MoneyGram,Paypal,Skrill,Transferwise

. Supply Ability: 1000000 pieces per month



Product Specification

300W • Rated Power AC: · Capacity: 266.4Wh

Power Indicate: LCD Display LCD . Solar Charging Input: 18-23V/3A(60W Max)

• Wireless Charge Output:

• Discharging Temperature

Range:

14~104°F(-10~40°C)

. Housing Material: ABS+PC Operation Humidity: 10%~90%


Highlight: Outdoor Home Emergency Solar Generator,

300W Small Solar Generator, QC3.0 USB Output Solar Generator



More Images





Product Description

300W Small Solar Generator with Solar Panel, QC3.0 USB Output Portable Charger Power Bank for Outdoor Home Emergency

Description of Portable Power Station

Portable power station is equipped with 300Wh lithium-ion battery pack, which contains upgraded chip, supports fast charging function and more than 1000 recycling times. Pure Sine Wave technology AC outlets deliver stable and safe power, without damage and reduces audible and electrical noise.

Apply to:Home emergency, small household appliances, digital products (such as UAV, mobile phone, computer, notebook,camera, handheld head, car refrigerator, etc.), long-distance self-driving travel, outdoor camping, lighting, picnic, wild fishing,environmental monitoring, geological exploration, car electricity, medical equipment and other scenes.

Product Specification

Product Specification	
Rated Power AC	300W
Capacity	266.4Wh (22.2V/12Ah or 3.7V/72000mAh)
Battery type	UL Li-ion
Power Indicate	LCD display
LCD Display	Battery remaining capacity, Battery fault, total output power,Over temperature,input power
DC Input	DC15V/4A(60W max,adapter with UL,CCC,CE,PSE,FCC)
DC fully Charging	
Time	About 5∼6H
Solar Controller Model	MPPT
Solar Charging Input	18-23V/3A(60W max)
Charging Temperature Range	32~104°F(0°C~40°C)
USB Output	Type-C output:PD 60W(5V3A,9V3A,12V3A,15V3A,20V3A)*1
	USB output:QC3.0(18W/5V3A,9V2A,12V1.5A)*3(total 54W)
Wireless Charge Output	10W
Cigarret Lighter output	12V/10A(120W)
DC output	12V/5A/DC5521*2(total 120W)
LED light	5W*2(total 10W Max)
	SOS,flashlight
AC Output	Output waveform:pure sinewave
	Output voltage:110V(US/JP) or 220V(EU/UK/AU/CN) (AC output
	voltage and frequency are customized, according to different
	countries and regions.Please refer to the actual product)
	Output frequency: 50/60Hz
	Peak AC output:600W
	AC continuous output: 300W
Discharging Temperature Range	14~104°F(-10~40°C)
Product size/Weight	273*181*244mm/about 3.95kg
Carton Size/Weight	59*30*32CM/about 17Kg/3PCS
Protections	over-charging, short-circuit ,low-voltage,over-temperatature and
	over-discharging protection
Color	Oranger+gray,Blue+gray,Red+gray,Green+gray
Housing Material	ABS+PC (fireproofing V0)
Working Temperature	-15~45°C
Tonking Tomporatoro	
Operation Humidity	10%~90%
	1*M300 portable power supply, 1*60W power supply,1*User
Standard Package Include	Manual, ,color box packaging,1*MC4 charging cable, 1*vehicle
	charging cable
Warrantly	12 months

9 Protections Strictly Abide By Charging Safety


Overcurrect protection
Short-circuit protection
Over discharge protection
Low temperature protection
High temperature protection
Overvoltage protection
Overload protection
Signal interference protection
Overcharge protection









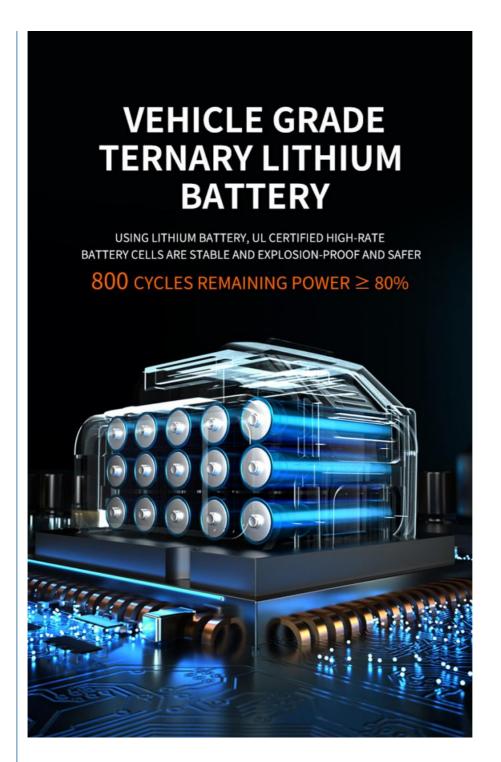









Packing list



18V-23V Mc4 connector cable



power supply adapter



12V-14V car charger cable



Instruction manual

Choose the one that suits you with more peace of mind

